




Hex Lag Screws

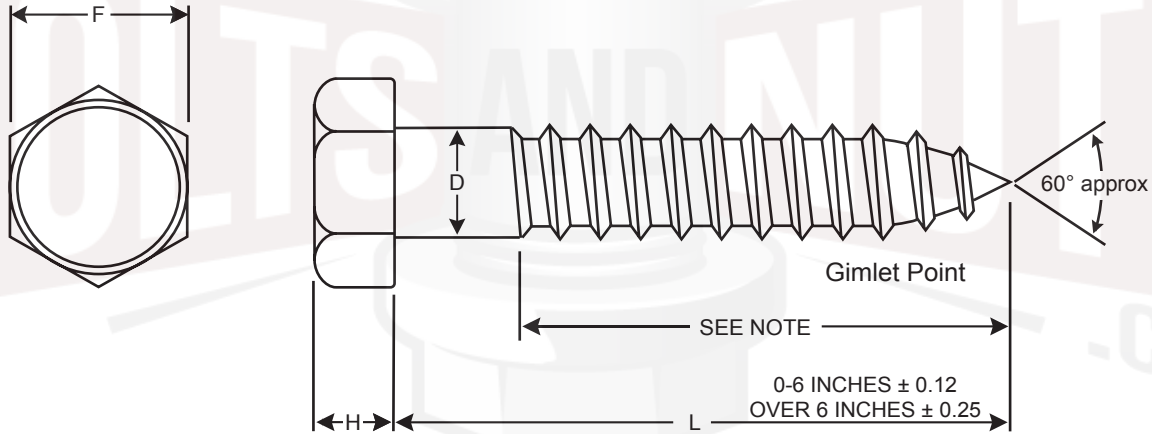

NOTE:
 Minimum thread length is 1/2 length of the screw plus 0.50" or 6" whichever is shorter.
 Screws too short for the formula shall be threaded as close to the head as practicable.

Diameter and Pitch	D		C		D	
	Body Diameter (Inches)		Width Across Flats (Inches)		Head Height	
	Max	Min	Max	Min	Max	Min
1/4"-10	0.26	0.237	0.438	0.425	0.188	0.15
5/16"-9	0.324	0.298	0.5	0.484	0.235	0.195
3/8"-7	0.388	0.36	0.562	0.544	0.268	0.226
1/2"-6	0.515	0.482	0.75	0.725	0.364	0.302

Dimensions: ASTM B18.2.1
Material: ASTM A307 Grade A
Tensile Strength: 60,000PSI Min
Threading: Lag Threads

440.606.6557

www.boltsandnuts.com

info@boltsandnuts.com

ONLINE FASTENER GROUP LLC CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ONLINE FASTENER GROUP LLC . ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.